



PSR 14 x 19

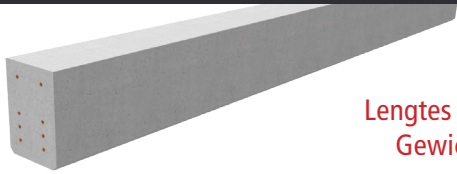

Lengtes : 2m tem 3m
Gewicht : 64kg/lm

PSR 14 x 29

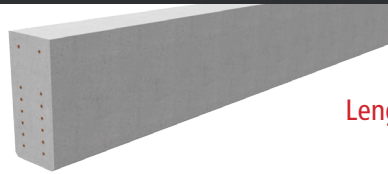

Lengtes : 3m tem 5,2m
Gewicht : 98kg/lm

Overspanning	Lengte	Belasting max. [GGT]
1.60	PSR14x19/200	48.5 kN/m
1.70	PSR14x19/200	45.0 kN/m
1.80	PSR14x19/220	39.0 kN/m
1.90	PSR14x19/220	36.5 kN/m
2.00	PSR14x19/240	32.0 kN/m
2.10	PSR14x19/240	30.0 kN/m
2.20	PSR14x19/260	27.0 kN/m
2.30	PSR14x19/260	25.0 kN/m
2.40	PSR14x19/280	23.0 kN/m
2.50	PSR14x19/280	21.0 kN/m
2.60	PSR14x19/300	20.0 kN/m
2.70	PSR14x19/300	18.0 kN/m

Overspanning	Lengte	Belasting max. [GGT]
2.60	PSR14x29/300	45.0 kN/m
2.70	PSR14x29/300	43.5 kN/m
2.80	PSR14x29/320	39.0 kN/m
2.90	PSR14x29/320	37.5 kN/m
3.00	PSR14x29/340	33.5 kN/m
3.10	PSR14x29/340	33.0 kN/m
3.20	PSR14x29/360	30.0 kN/m
3.30	PSR14x29/360	29.0 kN/m
3.40	PSR14x29/380	27.0 kN/m
3.50	PSR14x29/380	26.0 kN/m
3.60	PSR14x29/400	24.0 kN/m
3.70	PSR14x29/400	23.0 kN/m
3.80	PSR14x29/420	21.5 kN/m
3.90	PSR14x29/420	21.0 kN/m
4.00	PSR14x29/440	19.5 kN/m
4.10	PSR14x29/440	19.0 kN/m
4.20	PSR14x29/460	17.5 kN/m
4.30	PSR14x29/460	17.0 kN/m
4.40	PSR14x29/480	16.0 kN/m
4.50	PSR14x29/480	15.0 kN/m
4.60	PSR14x29/500	14.0 kN/m
4.70	PSR14x29/500	13.5 kN/m
4.80	PSR14x29/520	12.5 kN/m
4.90	PSR14x29/520	11.5 kN/m

OPLEG

Min. 15cm (andere mogelijkheden op aanvraag)

BRANDWEERSTAND

Controle door ons studiebureau

Ons studiebureau staat tot uw beschikking voor bijzondere dimensioneringen.